HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 25mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 1000MΩ Min
Operation Temperature: −55℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PA66+30%G.F UL94V−0
Shell:Cold Roller Steel,Ni Plated
Revit/Harpoon:Brass,Sn Over Ni Plated

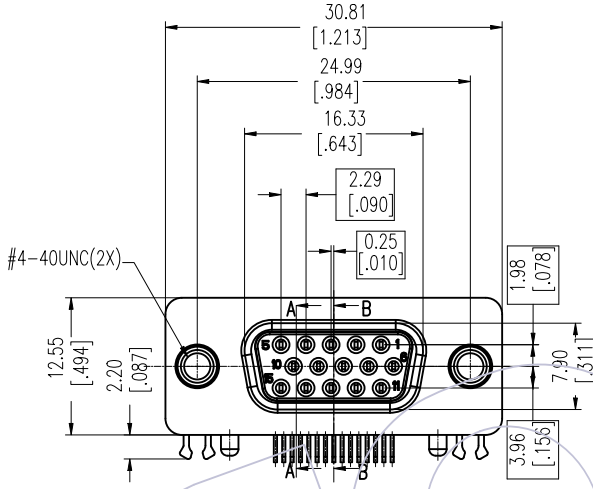

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

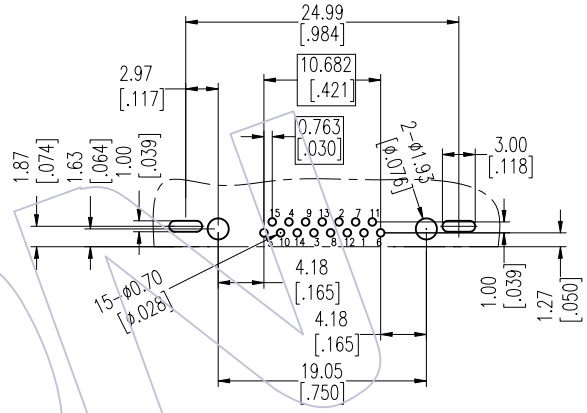



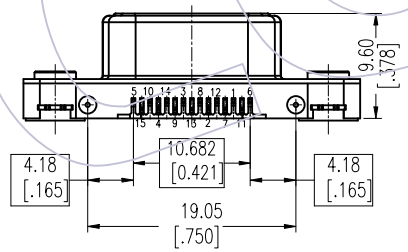



SECTION A−A



SECTION B−B

Ordering Information

6215B-15 F M N S1 B 01

- No.of Pins: 15P
- Product Type: M=With Revit Without Screw
- Contact Plating: S0=Gold Flash/Tin; S3=10u"Gold/Tin; S4=15u"Gold/Tin; S5=30u"Gold/Tin; SN=Tin
- Insulator Color: B:Black; U:Blue

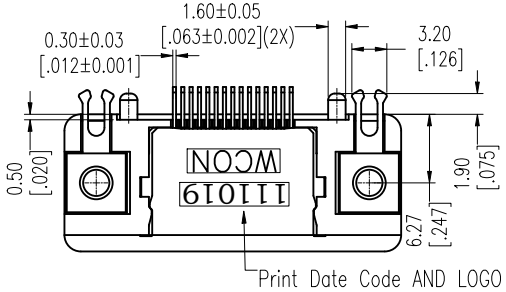



REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/18	NEW	------

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2012/12/18
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 6215B-15FMNS1B01

TITLE: Slim HD/R 15P FEMALE, 90° DIP, Short 9PIN

Customer NO.

WCON
Http: www.wcon.com

WCON−Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON−Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com