


# HSF

NOTES:   
 Rated Current: 3.0 AMP  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 500V AC/Minute  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -55°C to +105°C

Insulator Material: PBT G.F(UL94V-0)  
 Front Shell: SPCC, Ni Plated  
 Back Shell: SPCC, Tin Plated

## Ordering Information

6221-XX M X 00 X 01

No. of Pins:






9P  
 15P  
 25P  
 37P

Type:

B=With Back Nut  
 F=With Front Nut  
 N=Without Nut

Insulator Color:

B= Black  
 U= Blue

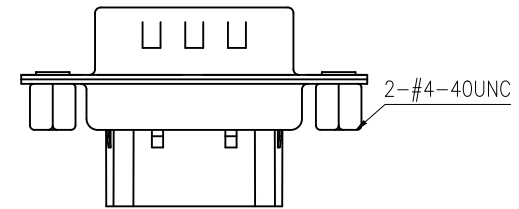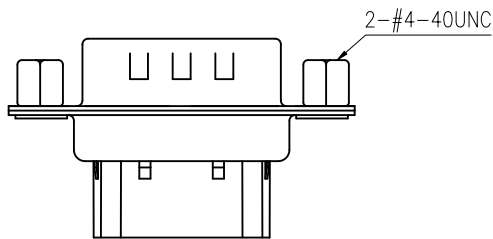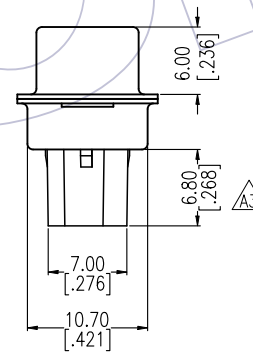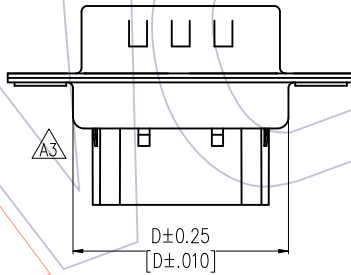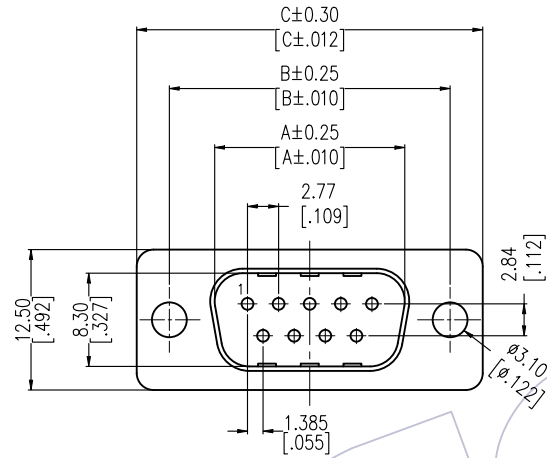






6221-XXMF00X01

6221-XXMB00X01



Pins	A	B	C	D
9P	16.92	24.99	30.80	19.18
15P	25.25	33.32	39.20	27.60
25P	38.96	47.04	53.05	41.00
37P	55.42	63.50	69.40	57.40

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A3	2022/12/01	ADD Bump		X.X	Allen	2022/12/01	UNIT	mm	6221-XXMX00X01 
A2	2015/10/22	Modify		X.XX ±0.40	CHECK	DATE	SIZE	A4	TITLE:
A1	2014/05/28	Modify 6221-XXMXXXB01 to 6221-XXMX00X01		X.XXX ±0.25	APPROVE	DATE	SHEET	1/1	D-SUB MALE DUAL ROW CRIMP TYPE
A0	2012/12/03	NEW	-----	X.XXX ±0.15	DATE	DATE	PROJ.		Customer NO.
				Angle ± 3°					
				DIM TOL					

# WCON

Http: www.wcon.com

WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com  
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: salesks@wcon.com